

**3611-1-1**

**3611-1-1**

**Application fields**


This pump is mainly fitted for water or solvant based automotive and industrial paint.

verwendet.

**Unsere Stärken**

**Strong points**

- All parts are in tempered stainless steel
- Reduction of "dead zones" allowing for a better flushing
- New sealing technology combining lip seals and liquid barrier
- Sealing options quickly interchangeable
- Strong, coated drive shaft, held in place with 2 bearings and a axial thrust
- Centering pins making pump assembly easier and increasing its accuracy

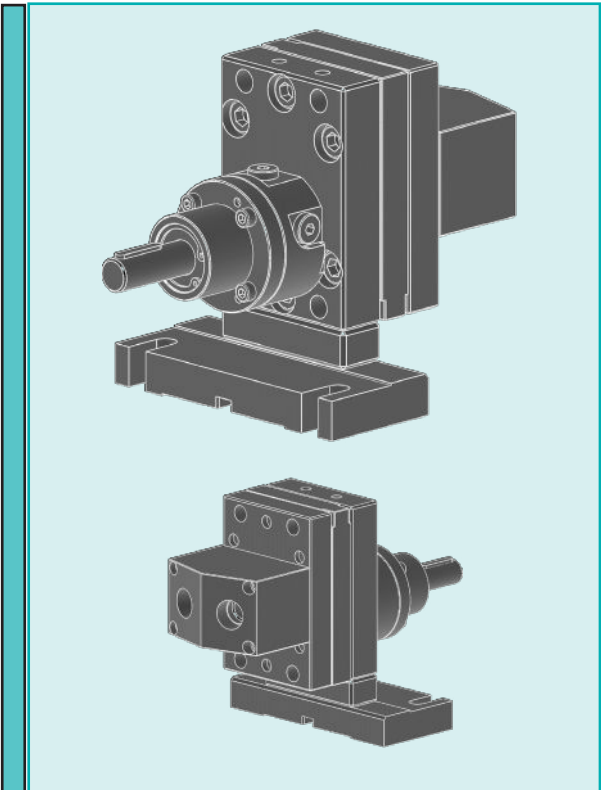

**Technische Merkmale**

**Technical data**

<b>Sealing :</b>	Lip seals and liquid barrier
<b>Rotation speed :</b>	From 10min <sup>-1</sup> to 200min <sup>-1</sup> , depending on the product involved
<b>Standard rotation :</b>	Clockwise rotation (A)
<b>Output pressure :</b>	Max. 15 bars
<b>Input/Output :</b>	2 holes Ø 15mm on the rear of the pump. Delivered with connecting block G3/8"
<b>Driving shaft diameter :</b>	Ø16mm with a 5mm key
<b>Drive shaft height :</b>	H=79mm

**Débits disponibles**

**Förderleistungen**

**Available outputs**

6.0cc/rev	10.0cc/rev	16.0cc/rev	22.0cc/rev
-----------	------------	------------	------------

**Options disponibles**

**Options**

- (T2) Entirely treated with ADLC
- (H51) Stand H=51mm compatible with group 2
- (H135) Stand H=135mm compatible with group 4
- (Z) Counterclockwise rotation
- (AZ) Clockwise and counterclockwise rotation
- (AB12) Connecting block G1/2"
- (AB34) Connecting block G3/4"
- Connections on request

